



by evolis

EDIKIO ACCESS

THE AFFORDABLE SOLUTION TO PRINT YOUR PRICE TAGS ON PLASTIC CARDS

Edikio Access is an all-in-one solution to print great-looking price tags on plastic cards. It is ideal for printing monochrome, single-sided tags in low volumes.


Made for little-experienced users, Edikio Access includes everything needed to update and print price tags in a few minutes:

- The Edikio software dedicated for your activity and customizable to your store needs
- A very compact printer for a minimal footprint in your store
- Consumables dedicated for use in the food industry*:
 - 100 black CR80 cards (credit-card format)
 - White ribbon for up to 500 prints

SOFTWARE FOR BEGINNERS

Part of the Edikio Access solution, the Edikio Software Lite Edition is an indispensable component of your price tag solution:

- Includes a library of over 350 images, sample item lists and tag layouts for your retail
- Allows to sort your products by categories
- Importation of your item list from an Excel file, or creation of a new item list directly within the software
- Dynamic preview of your tags before printing
- Exclusive Edikio Chalk font
- A powerful search tool (search for a PLU, a keyword...)
- Also includes a very basic mode allowing you to edit your tags one-by-one, without using any database

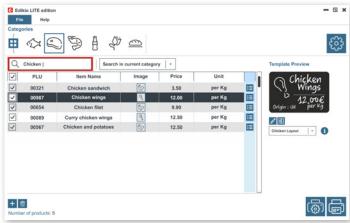

Edikio Printer Suite driver:

 On top of the Edikio Software, the included Windows printer driver brings extra value with visual notifications if the user's attention is required (in case of low remaining capacity of consumables for instance).

Ideal for small retails, such as:

Bakers, Butchers, Pastry chefs, Chocolate sellers, Cheesemongers, Fishmongers, Caterers, Wine merchants...

^{*} Detailed information and list of references available at www.edikio.com/food-contact-compliance

ENJOY THE BENEFITS OF PRINTING ON PLASTIC CARDS



Save time and gain flexibility

- Easy and quick to update thanks to the Edikio software
- No longer depend on a supplier :
 - Print your tags on-site yourself, in a batch or one-by-one
 - Re-print lost or updated tags in a few seconds



Comply with current regulations

• Thanks to full-tag customization, you can display all types of required info: allergens, product origin, nutritional facts...



Hygienic and dedicated for use in the food industry*

- PVC cards are free of any interstices, thus very easy to clean
- Evolis price tags are ideal for food retail and resist to cold and moist environments



Strengthen your brand image

- Make your own stylish price tag labels
- Harmonization of all your products
- Readable signs for your customers
- Professional, eye-catching shelves



Cost efficient

• Cheaper and longer-lasting than most alternative solutions, tags printed with Edikio Access are cost-efficient

^{*} Detailed information and list of references available at www.edikio.com/food-contact-compliance

A VARIETY OF CARDS AND ACCESSORIES ALSO AVAILABLE

Edikio Access offers a variety of combinations:

- Print with a white or a black ribbon
- Several colors of cards are available
- Several card layout possibilities (horizontal, vertical, double-tags, bent tags...)
- A wide range of accessories to help you setup your shelf









 $Pictures \ for \ illustration \ purposes \ only. \ Exact \ colors \ might \ differ. \ Please \ contact \ your \ Evolis \ representative.$

SPECIFICATIONS

Printer Edikio Access Single-sided, monochrome near-to-edge printing (margin 1.4 mm)	Commercial Part Number	EA2U0000BS-BS001
Included consumations Included software Edikio Software Suite, containing: Edikio Price tag software - LITE edition Edikio Printer Suite - Driver for Windows* Card size ISO CR80 - ISO 7810 [53.98 mm x 85.40 mm) Three-tag cards [53.97 mm x 85.85 mm - 3 x 28.5 mm) Card thickness 0,5 mm - 0.76 mm [20 mil - 30 mil) Ribbon saver Ves Automatic ribbon identification & setting Low / end of ribbon graphical notification (from Win 7) Printing technology Monochrome thermal transfer Printing speed - WHITE monochrome 240 cards / hour [15 sec / printed tag] Printing speed - BLACK monochrome 265 cards / hour [14 sec / printed tag] Card input feeder capacity Up to 25 cards [30 mil] Card output hopper capacity Up to 25 cards [30 mil] Printer Size [H x W x D] Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C [59°F / 86°F] Connectivity USB [1.0, 1.1, 2.0, 3.0] 1 x Edikio Access printer 1 x Edikio Software Suite - USB stick USB cable [1.80 mm] 10 x CR80 black cards 30 mit 1 1 x monochrome white ribbon for 500 prints Power supply and power cord		Edikio Access Single-sided, monochrome near-to-edge printing
Included software Edikio Prince tag software - LITE edition Edikio Prince To Windows* ISO CR80 - ISO 7810 IS3.98 mm x 85.60 mm) Three-tag cards [53,97 mm x 85,85 mm - 3 x 28.5 mm) Card thickness 0,5 mm - 0.76 mm [20 mil - 30 mil] Ribbon saver Automatic ribbon identification & setting Yes Low / end of ribbon graphical notification [from Win 7] Printing technology Monochrome thermal transfer Printing speed - WHITE monochrome 240 cards / hour [15 sec / printed tag] Printing speed - BLACK monochrome 265 cards / hour [14 sec / printed tag] Card input feeder capacity Up to 25 cards [30 mil] Card output hopper capacity Up to 25 cards [30 mil] Printer Size [H x W x D] Printer Size [H x W x D] Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C [59°F / 86°F] Connectivity USB [1.0, 1.1, 2.0, 3.0] 1 x Edikio Software Suite - USB stick USB cable [1.80 m] 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Included consumables	
Three-tag cards [53,97 mm x 85,85 mm - 3 x 28.5 mm) Card thickness 0,5 mm - 0.76 mm (20 mil - 30 mil) Ribbon saver Yes Automatic ribbon identification & setting Low / end of ribbon graphical notification (from Win 7) Printing technology Monochrome thermal transfer Printing speed - WHITE monochrome 240 cards / hour (15 sec / printed tag) Printing speed - BLACK monochrome 265 cards / hour (14 sec / printed tag) Card input feeder capacity Up to 25 cards (30 mil) Card output hopper capacity Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite - USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Included software	Edikio Price tag software - LITE edition
Automatic ribbon identification & setting Low / end of ribbon graphical notification (from Win 7) Printing technology Monochrome thermal transfer Printing speed - WHITE monochrome 240 cards / hour (15 sec / printed tag) Printing speed - BLACK monochrome 265 cards / hour (14 sec / printed tag) Card input feeder capacity Up to 25 cards (30 mil) Card output hopper capacity Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151 mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x C R80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Card size	
Automatic ribbon identification & setting Low / end of ribbon graphical notification (from Win 7) Yes (Edikio Printer Suite) Printing technology Monochrome thermal transfer Printing speed - WHITE monochrome 240 cards / hour (15 sec / printed tag) Printing speed - BLACK monochrome 265 cards / hour (14 sec / printed tag) Card input feeder capacity Up to 25 cards (30 mil) Card output hopper capacity Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151 mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite - USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Card thickness	0,5 mm - 0.76 mm (20 mil - 30 mil)
Low / end of ribbon graphical notification (from Win 7) Printing technology Monochrome thermal transfer 240 cards / hour (15 sec / printed tag) Printing speed - WHITE monochrome 265 cards / hour (14 sec / printed tag) Card input feeder capacity Up to 25 cards (30 mil) Card output hopper capacity Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Ribbon saver	Yes
Printing technology Monochrome thermal transfer 240 cards / hour (15 sec / printed tag) Printing speed - BLACK monochrome 265 cards / hour (14 sec / printed tag) Card input feeder capacity Up to 25 cards (30 mil) Card output hopper capacity Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Automatic ribbon identification & setting	Yes
Printing speed - WHITE monochrome 240 cards / hour [15 sec / printed tag] Printing speed - BLACK monochrome 265 cards / hour [14 sec / printed tag] Card input feeder capacity Up to 25 cards [30 mil] Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite - USB stick USB cable [1.80 m] 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Low / end of ribbon graphical notification (from Win 7)	Yes (Edikio Printer Suite)
Printing speed - BLACK monochrome 265 cards / hour (14 sec / printed tag) Card input feeder capacity Up to 25 cards (30 mil) Card output hopper capacity Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Printing technology	Monochrome thermal transfer
Card input feeder capacity Up to 25 cards (30 mil) Up to 25 cards (30 mil) Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Printing speed - WHITE monochrome	240 cards / hour (15 sec / printed tag)
Card output hopper capacity Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x C R80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Printing speed - BLACK monochrome	265 cards / hour (14 sec / printed tag)
Printer Size (H x W x D) 277 mm x 201 mm x 151mm Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Card input feeder capacity	Up to 25 cards (30 mil)
Printer Weight 1,66 kg Min/max operating temperature: 15°C / 30°C (59°F / 86°F) Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Card output hopper capacity	Up to 25 cards (30 mil)
Min/max operating temperature: 15°C / 30°C (59°F / 86°F) USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Printer Size (H x W x D)	277 mm x 201 mm x 151mm
Connectivity USB (1.0, 1.1, 2.0, 3.0) 1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Printer Weight	1,66 kg
1 x Edikio Access printer 1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Min/max operating temperature:	15°C / 30°C (59°F / 86°F)
1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints Power supply and power cord	Connectivity	USB (1.0, 1.1, 2.0, 3.0)
Warranty	Ship kit contents	1 x Edikio Software Suite – USB stick USB cable (1.80 m) 100 x CR80 black cards 30 mil 1 x monochrome white ribbon for 500 prints
vvarranty	Warranty	1 year
Windows 7 or higher (32 or 64 bits) 2 GB of RAM Minimum system requirements 500 MB hard disk free space 1024 x 768 pixel monitor resolution 1 USB port	Minimum system requirements	2 GB of RAM 500 MB hard disk free space 1024 x 768 pixel monitor resolution